

Technical data sheet

Clamp clip, single, metal pressure trough

Item number: 1155482



Suitable for all C profile rails with slot width 11–12 mm; at least 6.5 mm clear internal height and at least 18.5 mm clear internal width; metal troughs have strongly rounded edges on all sides, so that there is no risk of cable damage.

Version with welding and/or locknuts for use under difficult circumstances and for shake protection on request.



St Steel

FT Hot-dip galvanised

Master data

Item number	1155482
Description 1	Clamp clip
Description 2	with metal pressure sump
Manufacturer	OBO
Dimension	46-52mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	100
Unit of quantity	Piece
Weight	9.15 kg
Weight unit	kg/100 pc.
CO Footprint (GWP) Cradle-to-Gate	0,408 kg COe / 1 Piece


Technical data sheet

Clamp clip, single, metal pressure trough



Item number: 1155482

Dimensions

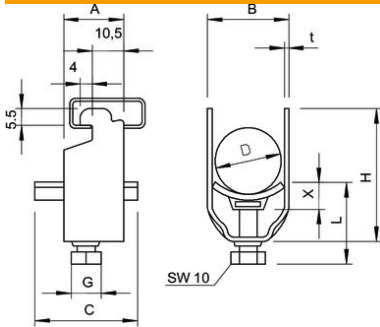

Dimension A	20 mm
Dimension B	57 mm
Dimension C	35 mm
Dimension G (mm)	M8
Dimension H	79 mm
Dimension L	37 mm
Dimension t	2 mm
Dimension x	5 mm

Technical data

Number of cables/pipes	1
for 1 cable H	79 mm
for 1 cable L	37
for 2 cable H	137 mm
for 2 cable L	56 mm
For pipe diameter, max.	50 mm
For pipe diameter, min.	50 mm
for rail with slot width (with interval), max.	12 mm
for rail with slot width (with interval), min.	11 mm
Halogen-free	no
Max. Tightening torque	5 Nm
With plastic trough	no
With metal trough	yes
Mounting type	Profile rail
Impact-resistant	no
Clamping range D, max.	52 mm
Clamping range D, min.	46 mm
Surface addition	hot galvanised
Material addition	Steel
With counter-trough	no
Material of trough	Steel