


Technical data sheet

Spacer clip 732 A4

Item number: 1362474

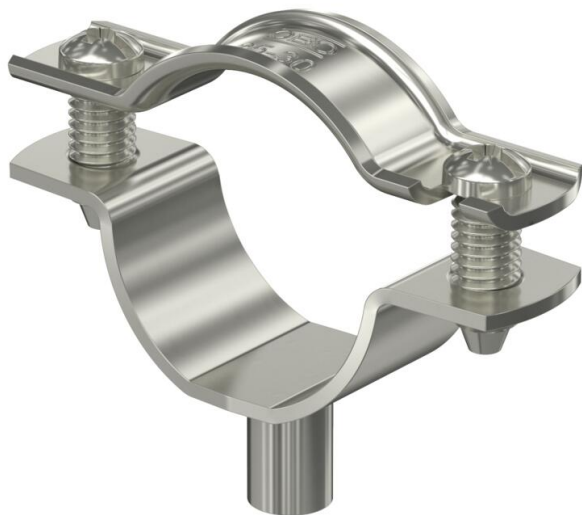

Spacer clip for the installation of pipes and cables on walls, ceilings and floors. With self-locking cover. Fastening via attachment piece with internal thread.

Approved for the maintenance of electrical function according to DIN 4102 Part 12, maintenance of electrical function classes E 30 to E 90.



A4 Stainless steel

Master data

| | |
|---------------------|-----------------------------|
| Item number | 1362474 |
| Type | ASG 732 30 A4 |
| Description 1 | Distance saddle |
| Description 2 | with threaded connection M6 |
| Manufacturer | OBO |
| Dimension | 25-30mm |
| Material | Stainless steel |
| Smallest sales unit | 20 |
| Unit of quantity | Piece |
| Weight | 3.37 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Spacer clip 732 A4

Item number: 1362474



Dimensions

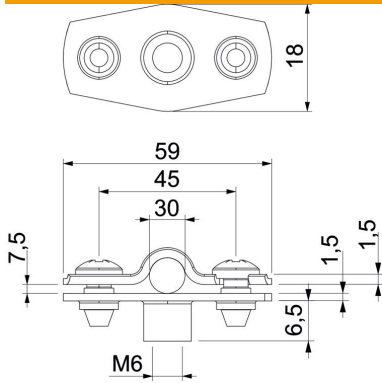

| | |
|-------------------|--------|
| Dimension A | 59 mm |
| Dimension B | 45 mm |
| Dimension b | 18 mm |
| Dimension D | 30 mm |
| Dimension d max. | 30 mm |
| Dimension d min. | 25 mm |
| Dimension H1 | 12 mm |
| Dimension t1 (mm) | 1.5 |
| Dimension t2 (mm) | 1.5 |
| Dimension x | 7.5 mm |

Technical data

| | |
|----------------------------------|---------------------|
| Distance to the wall | yes |
| Number of cables/pipes | 1 |
| Version for | Closed |
| Fastening type | Threaded connection |
| For diameter | 25 - 30 |
| Suitable in fire protection area | yes |
| Halogen-free | yes |
| Plastic-covered | no |
| Material thickness | 1.5 mm |
| Clamping range D, max. | 30 mm |
| Clamping range D, min. | 25 mm |
| UV-resistant | yes |