

# Technical data sheet

## External corner Signa Base AE 70170

Item number: 6132748



External corner as a fitting for changing the direction of the Signa Base device installation trunking.  
Cut-concealing external corner for snapping onto the base. Angle adjustable.



**PC/ABS** Polycarbonate/Acrylnitrile-butadiene-styrene

### Master data

|                     |  |
|---------------------|--|
| Item number         | 6132748                                      |
| Type                | BRK AE70170 rws                              |
| Description 1       | External corner                              |
| Description 2       | SIGNA BASE 70x170 9010                       |
| Manufacturer        | OBO  |
| Dimension           | 118x137x180                                  |
| Colour              | Pure white; RAL 9010                         |
| Material            | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit | 1  |
| Unit of quantity    | Piece  |
| Weight              | 20.5 kg                                      |
| Weight unit         | kg/100 pc.                                   |


# Technical data sheet

External corner Signa Base AE 70170

Item number: 6132748



## Dimensions

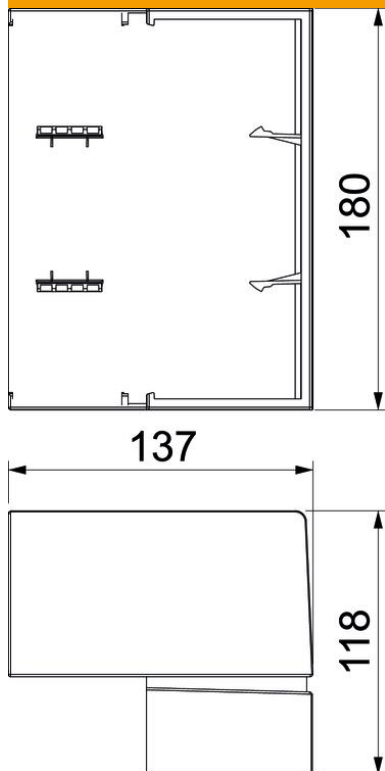

|        |        |
|--------|--------|
| Length | 118 mm |
| Width  | 137 mm |
| Height | 180 mm |

## Technical data

|                                   |              |
|-----------------------------------|--------------|
| Version for                       | Hood fitting |
| Halogen-free                      | yes          |
| Cable retaining clip              | no           |
| Duct connector                    | no           |
| Cover mounting type               | Cross-over   |
| Mounting perforation in base      | no           |
| Protection rating                 | IP40         |
| Protective film                   | no           |
| Protection rating IK code         | IK07.        |
| Symmetrical                       | no           |
| Permitted temperature range, max. | 60 °C        |
| Permitted temperature range, min. | -5 °C        |
| Angle range, max.                 | 93 mm        |
| Angle range, min.                 | 85 mm        |