


# Technical data sheet

## HF-VK 75 wiring ducts, duct width 37.5

Item number: 6132480

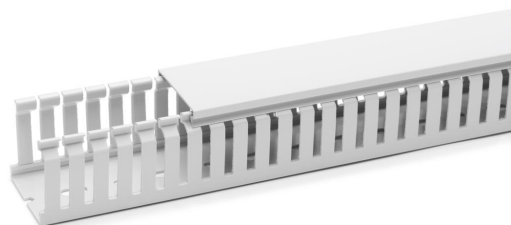

Halogen-free wiring trunking for horizontal and vertical routing in the switchgear cabinet.

Direct mounting on the wall with double-sided adhesive tape or via the integrated base perforation. Hardly inflammable and self-extinguishing after removal of a naked flame. The retainers in the duct base can be broken out without tools.

Tested to DIN EN 50085-2-3.

Base and cover in set.



**PC/ABS** Polycarbonate/Acrylnitrile-butadiene-styrene

### Master data

Item number	6132480
Type	HFVK 7537 lgr
Description 1	Slotted cable trunking system
Description 2	HF DIN Set 75x37,5 7035
Manufacturer	OBO
Colour	Light grey; RAL 7035
Material	Polycarbonate/Acrylnitrile-butadiene-styrene
Smallest sales unit	2
Unit of quantity	Metre
Weight	50 kg
Weight unit	kg/100 m

### Dimensions

Length	2,000 mm
Width	38 mm
Height	75 mm

# Technical data sheet

HF-VK 75 wiring ducts, duct width 37.5

Item number: 6132480



## Technical data

Side wall version	Slotted
Fastening type	Base perforation
Flexible	no
Halogen-free	yes
Creepage current-resistant	yes
With cover	yes
Usable cross-section	21.07 cm <sup>2</sup>
Slot spacing	7.5 mm
Slot width	5 mm
Permitted temperature range, max.	90 °C
Permitted temperature range, min.	-25 °C