


Technical data sheet

Wiring trunking NU-DIN 50, trunking width 37.5

Item number: 6132436

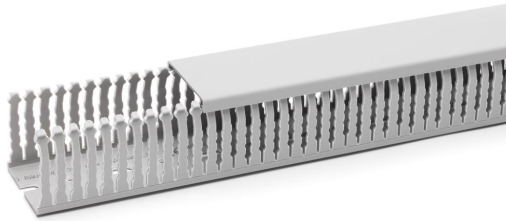


Wiring duct with double-sided adhesive tape for horizontal and vertical routing in the switchgear cabinet.
Direct mounting on the wall with double-sided adhesive tape or via the integrated base perforation. Flame-retardant and self-extinguishing after removal of an active flame. The retainers in the trunking base can be broken out without tools.
Tested to DIN EN 50085-2-3.
Base and cover in set.

PVC Polyvinylchloride

Master data

Item number	6132436
Type	NUDIN 5037 sgr
Description 1	Slotted cable trunking system
Description 2	NU DIN Set 50x37,5 7030
Manufacturer	OBO
Colour	Stone grey; RAL 7030
Material	Polyvinylchloride
Smallest sales unit	2
Unit of quantity	Metre
Weight	39.064 kg
Weight unit	kg/100 m

Dimensions



Length	2,000 mm
Width	38 mm
Height	50 mm

Technical data sheet

Wiring trunking NU-DIN 50, trunking width 37.5

Item number: 6132436



Technical data

Side wall version	Slotted
Fastening type	Base perforation
Flexible	no
Halogen-free	no
Creepage current-resistant	yes
With cover	yes
Usable cross-section	13.4 cm ²
Slot spacing	8 mm
Slot width	4 mm
Self-extinguishing	yes