

# Technical data sheet

## Trunking, type WDK 100130

Item number: 6026273



Wall installation trunking as trunking base with base perforation and matching trunking cover.

Four cover fixing devices included.  
The lid clamp can be moved along the entire length of the trunking.



**PVC** Polyvinylchloride

### Master data

|                     |                       |
|---------------------|-----------------------|
| Item number         | 6026273               |
| Type                | WDK100130CW           |
| Description 1       | Wall trunking system  |
| Description 2       | with base perforation |
| Manufacturer        | OBO                   |
| Dimension           | 100x130x2000          |
| Colour              | Cream; RAL 9001       |
| Material            | Polyvinylchloride     |
| Smallest sales unit | 8                     |
| Unit of quantity    | Metre                 |
| Weight              | 214 kg                |
| Weight unit         | kg/100 m              |


# Technical data sheet

## Trunking, type WDK 100130

Item number: 6026273



### Dimensions

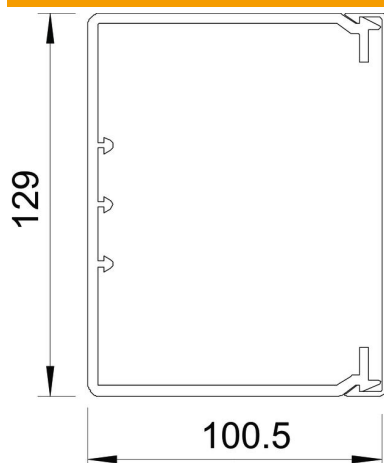

|        |          |
|--------|----------|
| Length | 2,000 mm |
| Width  | 130 mm   |
| Height | 100 mm   |

### Technical data

|                                                             |                  |
|-------------------------------------------------------------|------------------|
| Number of fixed partitions                                  | 0                |
| Number of cables NYM 3 x 1.5 mm² Ø 10.5 mm (without socket) | 61               |
| Number of cables NYM 3 x 2.5 mm² Ø 11.5 mm (without socket) | 51               |
| Number of cables NYM 5 x 1.5 mm² Ø 12.0 mm (without socket) | 47               |
| Number of insertable partitions                             | 1                |
| Version, cable trunking cover                               | Loose            |
| Fastening type                                              | Base perforation |
| Halogen-free                                                | no               |
| Cable retaining clip                                        | yes              |
| Duct connector                                              | no               |
| Delivery on a roll                                          | no               |
| Usable cross-section                                        | 10717 mm²        |
| Protection rating                                           | IP30             |
| Protective film                                             | no               |
| Protection rating IK code                                   | IK04             |
| Permitted temperature range, max.                           | 60 °C            |
| Permitted temperature range, min.                           | -5 °C            |