


# Technical data sheet

## Trunking, type WDKH 60090

Item number: 6175469

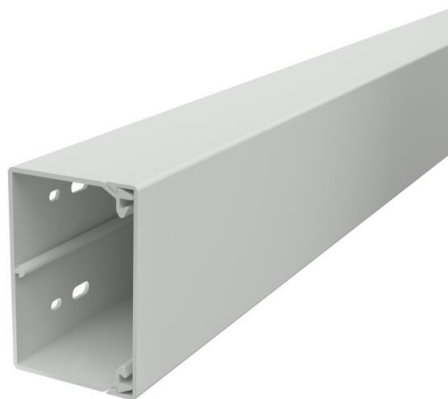

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.  
During installation, ensure that only halogen-free accessories and fastening materials are used.



Polycarbonate/Acrylnitrile-butadiene-styrene

### Master data

|                                   |                                              |
|-----------------------------------|----------------------------------------------|
| Item number                       | 6175469                                      |
| Type                              | WDKH-60090LGR                                |
| Description 1                     | Wall trunking system                         |
| Description 2                     | halogen-free                                 |
| Manufacturer                      | OBO                                          |
| Dimension                         | 60x90x2000                                   |
| Colour                            | Light grey; RAL 7035                         |
| Material                          | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit               | 24                                           |
| Unit of quantity                  | Metre                                        |
| Weight                            | 81.5 kg                                      |
| Weight unit                       | kg/100 m                                     |
| CO Footprint (GWP) Cradle-to-Gate | 4,7482 kg COe / 1 Meter                      |


# Technical data sheet

## Trunking, type WDKH 60090

Item number: 6175469



### Dimensions

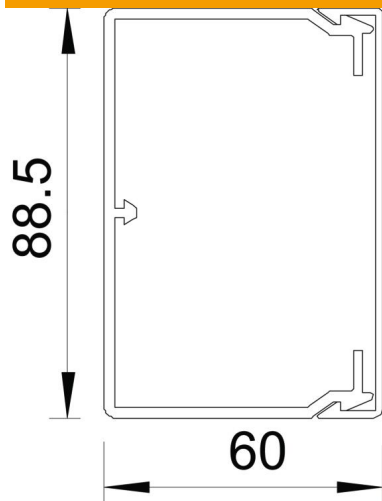

|        |          |
|--------|----------|
| Length | 2,000 mm |
| Width  | 90 mm    |
| Height | 60 mm    |

### Technical data

|                                                                         |                       |
|-------------------------------------------------------------------------|-----------------------|
| Number of fixed partitions                                              | 0                     |
| Number of cables NYM 3 x 1.5 mm <sup>2</sup> Ø 10.5 mm (without socket) | 19                    |
| Number of insertable partitions                                         | 0                     |
| Version, cable trunking cover                                           | Loose                 |
| Fastening type                                                          | Base perforation      |
| Base perforation                                                        | with base perforation |
| Maintain electrical functions                                           | no                    |
| Halogen-free                                                            | yes                   |
| Cable retaining clip                                                    | yes                   |
| Duct connector                                                          | no                    |
| Delivery on a roll                                                      | no                    |
| Usable cross-section                                                    | 4360 mm <sup>2</sup>  |
| Protection rating                                                       | IP30                  |
| Protective film                                                         | no                    |
| Protection rating IK code                                               | IK07.                 |
| Permitted temperature range, max.                                       | 90 °C                 |
| Permitted temperature range, min.                                       | -5 °C                 |